

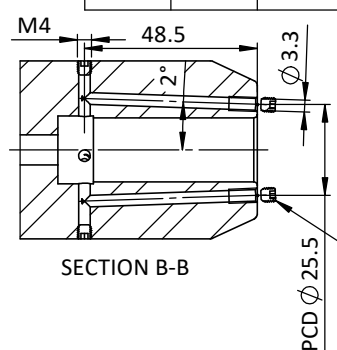



All Dimensions are in MM

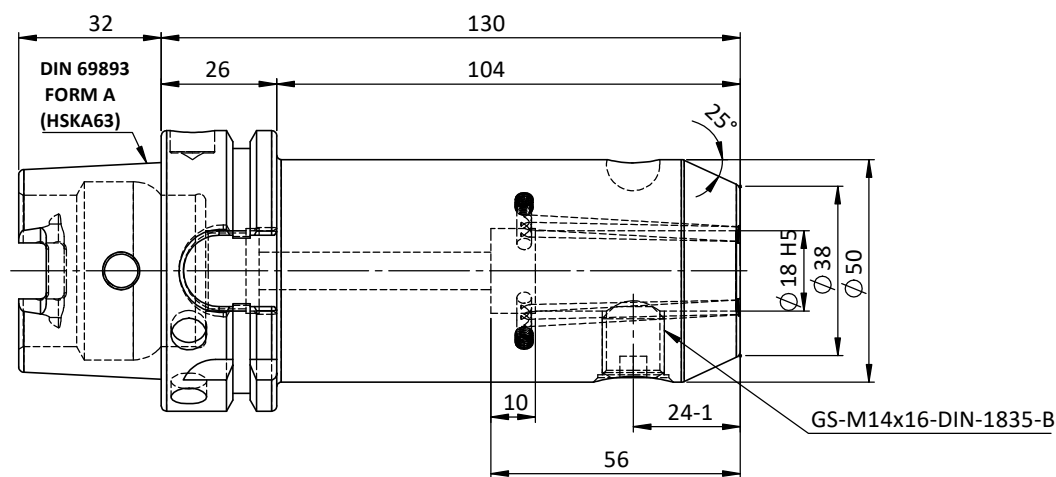

For Customer Approval

SCREWS TO BE PACKED SEPARATELY
IN PLASTIC POUCH WITH LABEL & PUT INTO
WELDON BORE & THEN SEAL THE HOLDER WITH COVER
LABEL FOR PLASTIC BAGS:
Verschlusschraube
Grub Screw
M4 X 4mm x 2mm

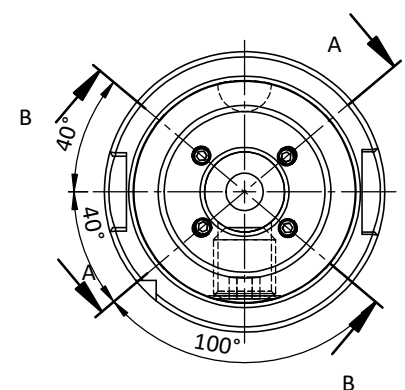

LABEL :
2002271.1805
WELDON-AUFNAHME MIT KK
WELD.HOLDER COOL.CHANNEL
DIN69893 HSK63A
WK 18 mm x 130 mm
G2.5 25000 U/MIN

NOTE :
BALANCING 2.5G AT 25000 RPM
WEIGHT :2.0kg

**MARKING : DIN 69893 A HSK63A WK18 H130
G2.5 25000 U/MIN**

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|---------------------|------------------|------|
| 1 | FWA063H-EKH18130 | HSKA063EK18130WW | 1 |
| 2 | GS-M14X16-DIN1835-B | GRUB SCREW | 1 |
| 3 | GS-M4X4 | GRUB SCREW | 4 |
| 4 | GS-M4X4-COATING | GRUB SCREW | 4 |

| μm | 0.012 | 0.025 | 0.05 | 0.1 | 0.2 | 0.4 | 0.8 | 1.6 | 3.2 | 6.3 | 12.5 | 25 | 50 |
|-------------------------------------|--------|--------|-----------------------------------|-----|-----------|-----|-------------------------------------|-----|-----|-----|------|-----|----------------|
| GRADES | N1 | N2 | N3 | N4 | N5 | N6 | N7 | N8 | N9 | N10 | N11 | N12 | |
| SYMBOLS | ▽▽▽ | | | ▽▽▽ | | | ▽▽ | | | ▽ | | | ~ |
| TOLERANCE FREE DIMENSIONS TOLERANCE | 2023 | | NAME | | DATE | | 2002271.1805 | | | | | | |
| Dimns. | Dia | Length | DRAWN | | YSK 04/12 | | | | | | | | |
| 0.5 to 3 | ± 0.05 | ± 0.10 | CHECKED | | RVL 04/12 | | | | | | | | |
| 3 to 6 | ± 0.10 | ± 0.15 | APPROVED | | | | | | | | | | |
| 6 to 30 | ± 0.15 | ± 0.20 | SCALE: NTS | | QTY.: | | DRAWING No. FWA063H-EKH18130 | | | | | | |
| 30 to 120 | ± 0.20 | ± 0.25 | PART NAME: HSKA63EK18130WW | | | | | | | | | | REV. 00 |
| 120 to 500 | ± 0.30 | ± 0.50 | | | | | | | | | | | |