



Waagrechtspanner

Ausführung: Stahl, verzinkt und passiviert mit medienbeständigem Hebelarm und Fußbefestigung. Niete aus Edelstahl.


Anwendung: Optimal für den Einsatz bei der Fertigung von Serienteilen.

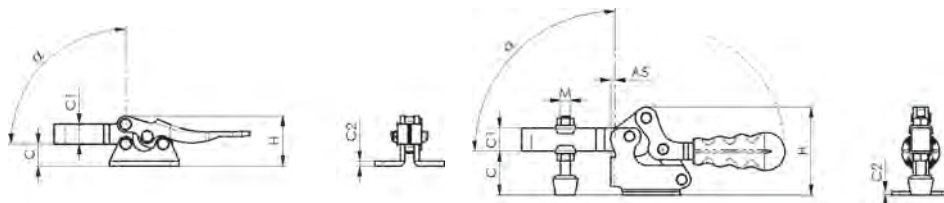

3895 0000



3895 0000

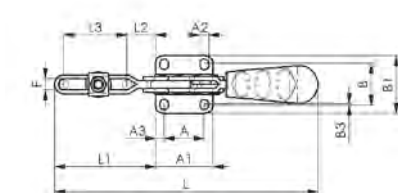

3895 0010-3895 0040



3895 0010-3895 0040

Maßtabelle

Größe	A	A1	A2	A3	B	B1	B3	C	C1	C2	F	H	L	L1	L2	L3	M	α
0	11,1	24	6,8	4	16	23,8	4,4	7,4	6,8	1,6	4,8	17	68	21	5	12	M4	87°
1	13,5	25	5,2	5,7	19	27	-	19	9,5	2	5,8	38,2	105	36,8	12	20	M5	94°
2	26	38	5,5	6	28	40	3	25	14	2,5	6,2	52,6	162	61,4	19	36,5	M6	96°
3	26	42	6,6	8	31	47	2,5	34	17,5	3	9	68,5	189	66,3	22	36,8	M8	95°
4	41,2	59	8,7	9	43	59	1,8	45	23,8	4	11,4	90	269	103	28,5	64,8	M10	95°

Größe	Spannhöhe mm	Gesamthöhe mm	Gesamtlänge mm	Haltekraft N	AMF	
					3895 €	Bestell- Nr.
0	7,4	17	68	380	8,60	...0000
1	19	38,2	105	700	12,65	...0010
2	25	52,6	162	900	15,20	...0020
3	34	68,5	189	2200	18,55	...0030
4	45	90	269	3400	24,60	...0040

(W340)

